


# LADDERSTORE

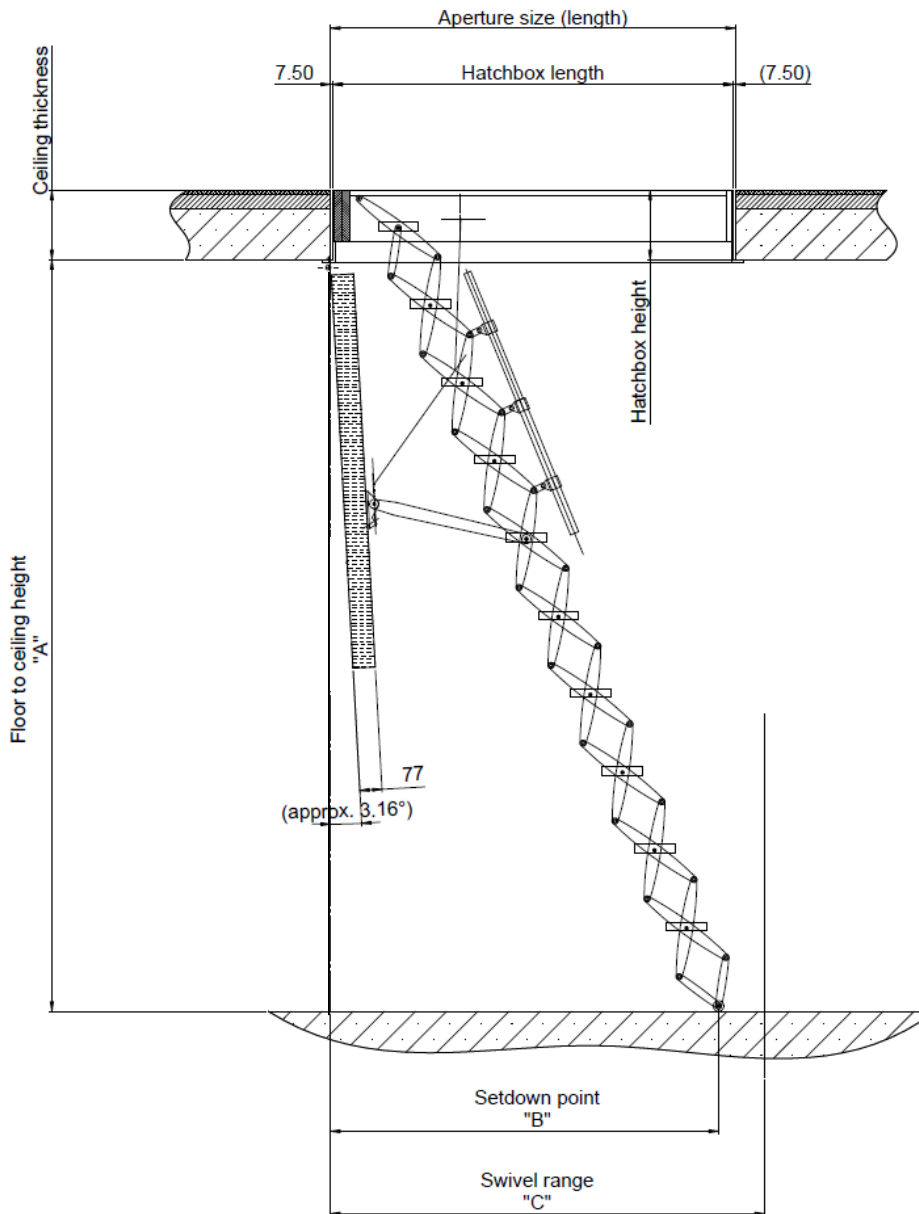

Treads	Minimum Aperture Length	Minimum Aperture Width	Floor to Ceiling (Dim 'A')	Setdown Point (Dim 'B')	Swival Range (Dim 'C')
9	800	550 (700 min rec)	2200 - 2500	1270	1300
10	800	550 (700 min rec)	2501 - 2790	1370	1410
11	900	550 (700 min rec)	2791 - 3090	1480	1520
12	1000	550 (700 min rec)	3091 - 3390	1590	1640
13	1300	550 (700 min rec)	3391 - 3690	1860	1900
14	1400	550 (700 min rec)	3691 - 3990	1990	2020
15	1500	550 (700 min rec)	3991 - 4300	2110	2150