


TRADE 200 - 2 - Section Push Up

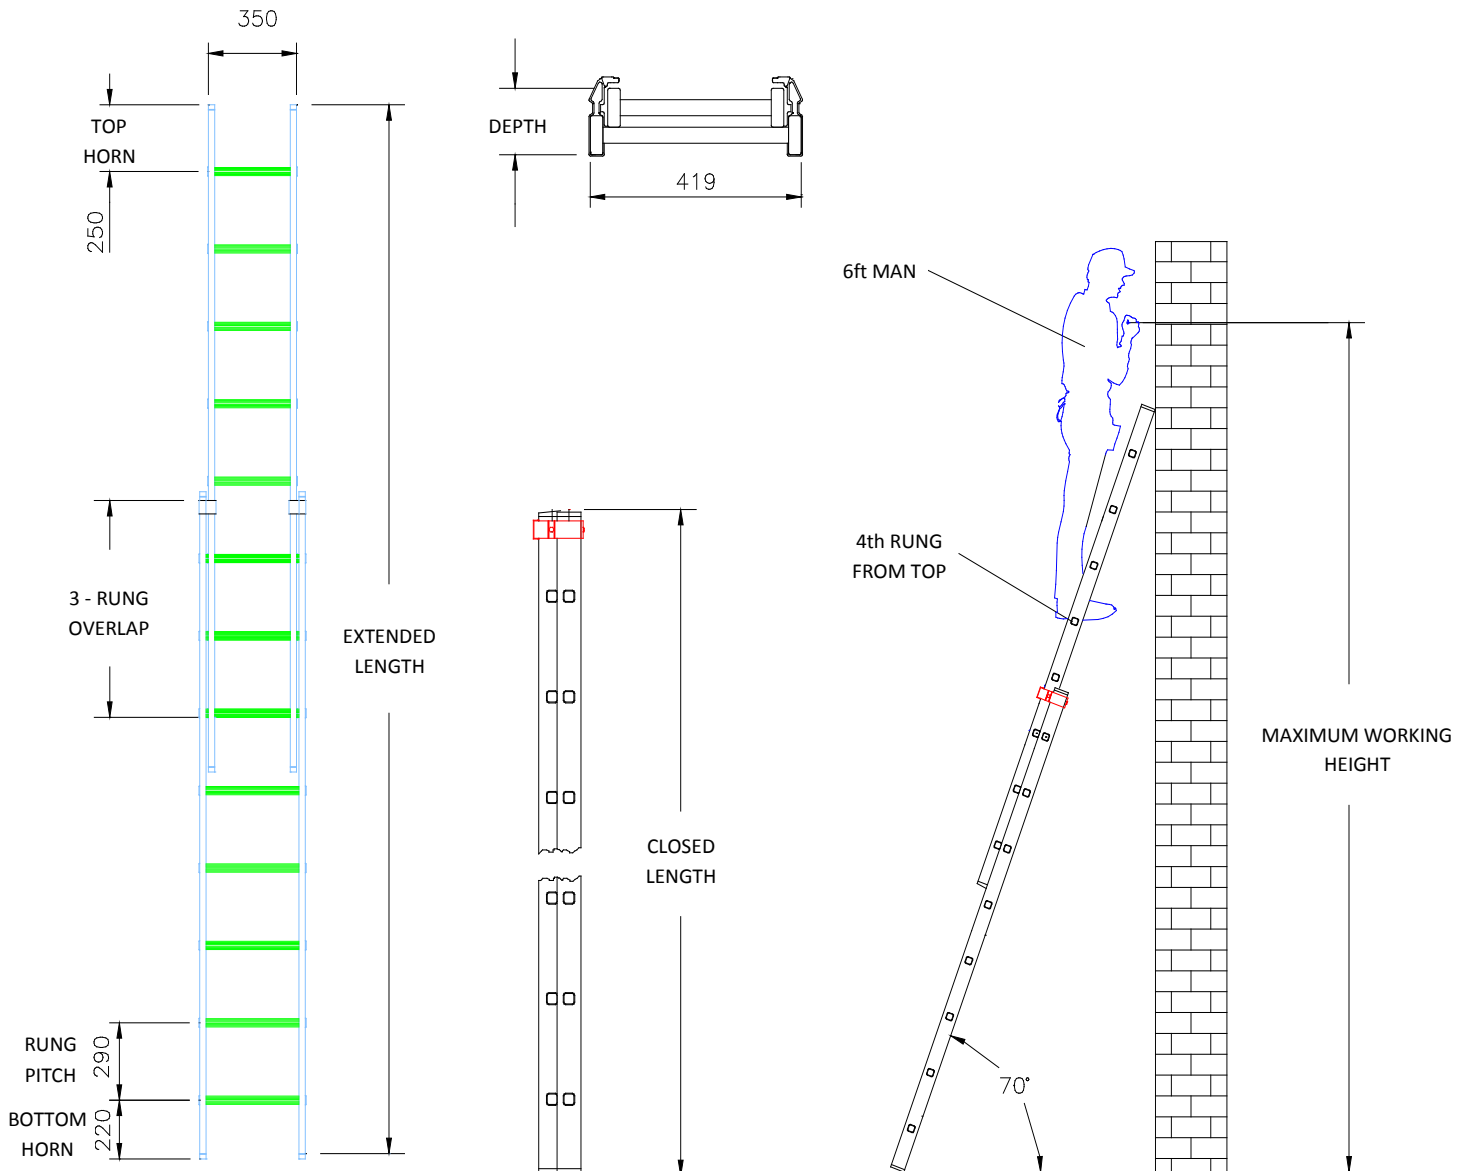


Code	Nominal Size (m)	No. of Rungs	Closed Length (mm)	Extended Length (mm)	Working Height (mm)	Stile Size (mm)	Stile Material	Depth (mm)	Boxed Volume (m3)	Weight (kg)	Packing Size (mm)
570110	1.92	6	1920	2790	3396	64 x 25 x 1.24	Aluminium Alloy - Extruded	111.0	0.089	7.00	1920 x 419 x 111
570111	2.50	8	2500	3950	4412	64 x 25 x 1.24	Aluminium Alloy - Extruded	111.0	0.116	8.21	2500 x 419 x 111
570112	3.08	10	3080	5110	5502	64 x 25 x 1.24	Aluminium Alloy - Extruded	111.0	0.143	9.97	3080 x 419 x 111
570113	3.66	12	3660	6270	6592	73 x 25 x 1.24	Aluminium Alloy - Extruded	124.5	0.191	12.59	3660 x 419 x 124.5
570114	4.24	14	4240	7430	7682	84 x 25 x 1.4	Aluminium Alloy - Extruded	141.0	0.250	17.44	4240 x 419 x 141
570115	4.82	16	4820	8590	8772	84 x 25 x (2.05/1.45)	Aluminium Alloy - Extruded	141.0	0.285	21.84	4820 x 419 x 141
570116	5.40	18	5400	9750	9862	84 x 25 x (2.55/1.80)	Aluminium Alloy - Extruded	141.0	0.319	28.73	5400 x 419 x 141

Technical Data -

Duty Rating 110kg
 Sections interlocked by top and bottom clips
 Rubber serrated feet tagged into end of stile
 Square rungs (30mm sq) - Ends are expanded and riveted into stiles
 Material for rungs: Aluminium Alloy - Seam welded

Classification: Approved to EN131 - (BS/GS) Britain / Germany

TRADE 200 - 3 - Section Push Up

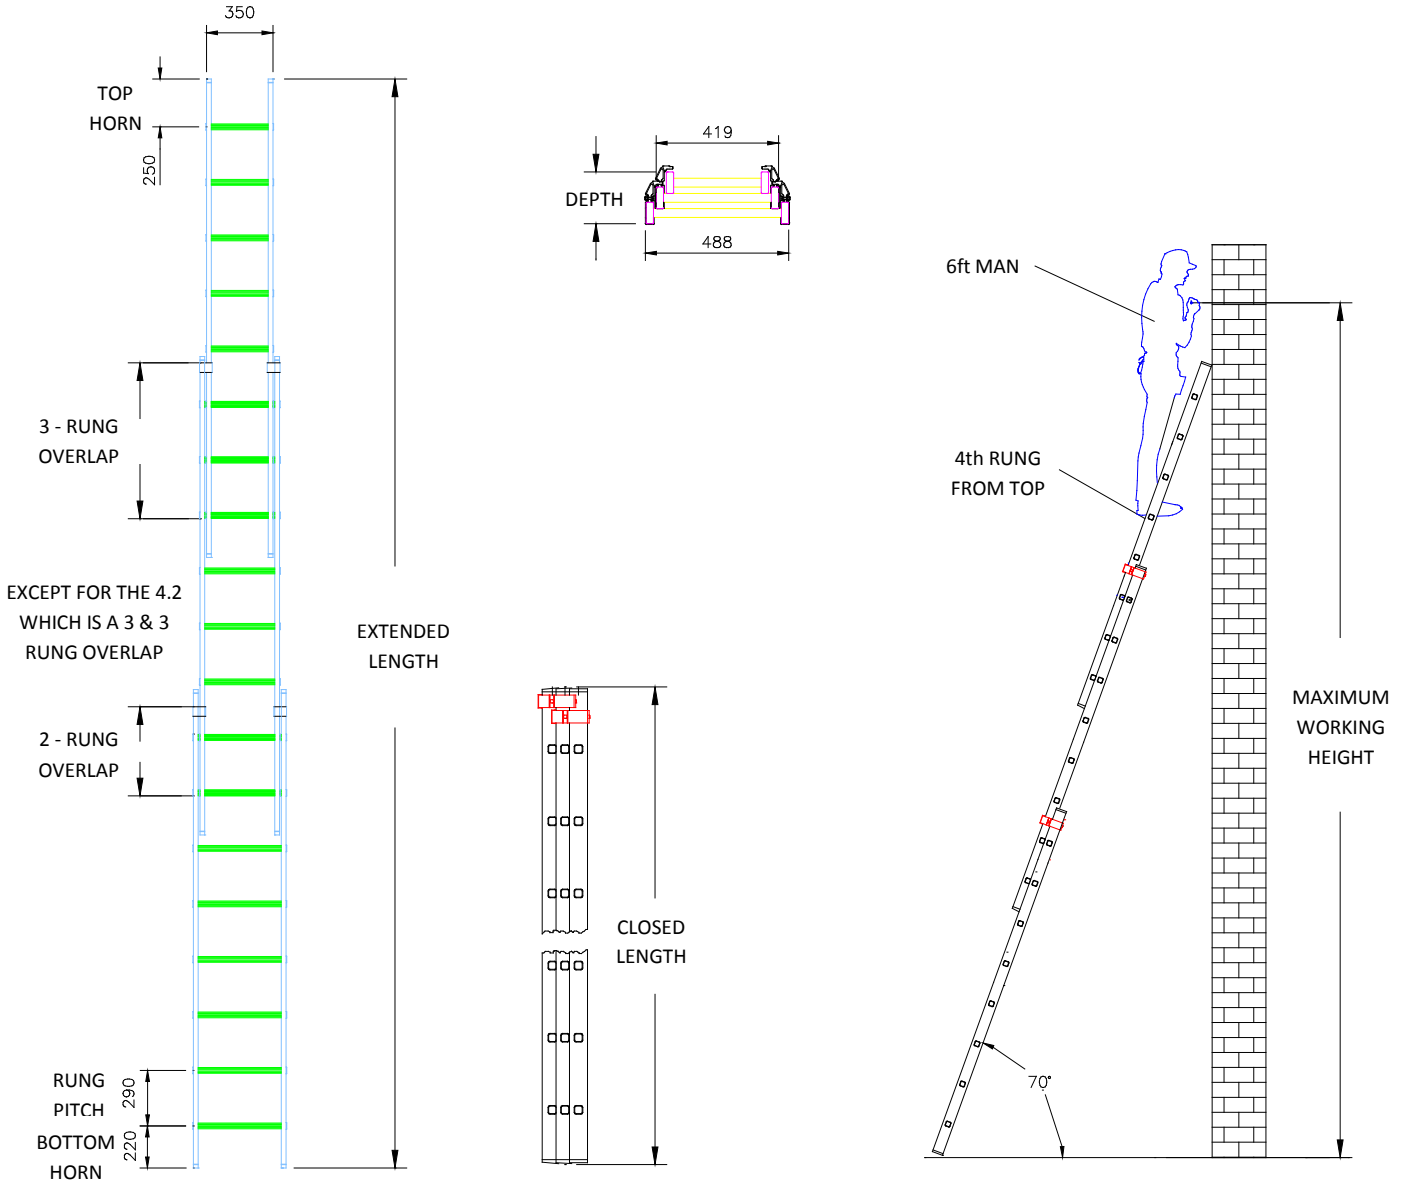

Code	Nominal Size (m)	No. of Rungs	Closed Length (mm)	Extended Length (mm)	Working Height (mm)	Stile Size (mm)	Stile Material	Depth (mm)	Boxed Volume (m3)	Weight (kg)	Packing Size (mm)
570120	1.92	6	1920	3950	4507	73 x 25 x 1.24	Aluminium Alloy - Extruded	176.0	0.142	11.90	1920 x 488 x 176
570121	2.50	8	2500	5690	6047	73 x 25 x 1.24	Aluminium Alloy - Extruded	176.0	0.152	13.76	2500 x 488 x 176
570122	3.08	10	3080	7430	7682	84 x 25 x (1.80/1.40)	Aluminium Alloy - Extruded	198.0	0.212	20.99	3080 x 488 x 198
570123	3.66	12	3660	9170	9317	84 x 25 x (2.05/1.45)	Aluminium Alloy - Extruded	198.0	0.252	25.82	3660 x 488 x 198
570124	4.24	14	4240	10620	10680	84 x 25 x (2.55/1.80)	Aluminium Alloy - Extruded	198.0	0.292	34.81	4240 x 488 x 198

Technical Data -

- Duty Rating 110kg
- Sections interlocked by top and bottom clips
- Rubber serrated feet tagged into end of stile
- Square rungs (30mm sq) - Ends are expanded and riveted into stiles
- Material for rungs: Aluminium Alloy - Seam welded

Classification: Approved to EN131 - (BS/GS) Britain / Germany